

MODEL TMG10

Membrane Type Cross Linked Fully Aromatic Polyamide Composite
 Membrane Surface Area 73 ft² (7 m²)

Performance Specification

NaCl Solution

Salt Rejection

99.5 %

Product Flow Rate

2,000 gpd (8 m³/day)

Notes :

1. Test Conditions

Feed Water Pressure 110 psi (0.75 MPa)
 Feed Water Temperature 77 °F (25 °C)
 Feed Water Concentration 500 mg/l as NaCl
 Recovery Rate 15 %
 Feed Water pH 7


2. Minimum Salt Rejection 99.0 %

3. Minimum Product Flow Rate 1,600 gpd (6 m³/day)

4. The membrane area stated is a nominal value and is not a guaranteed specification.

Dimensions

All dimensions shown in inches (millimeters).

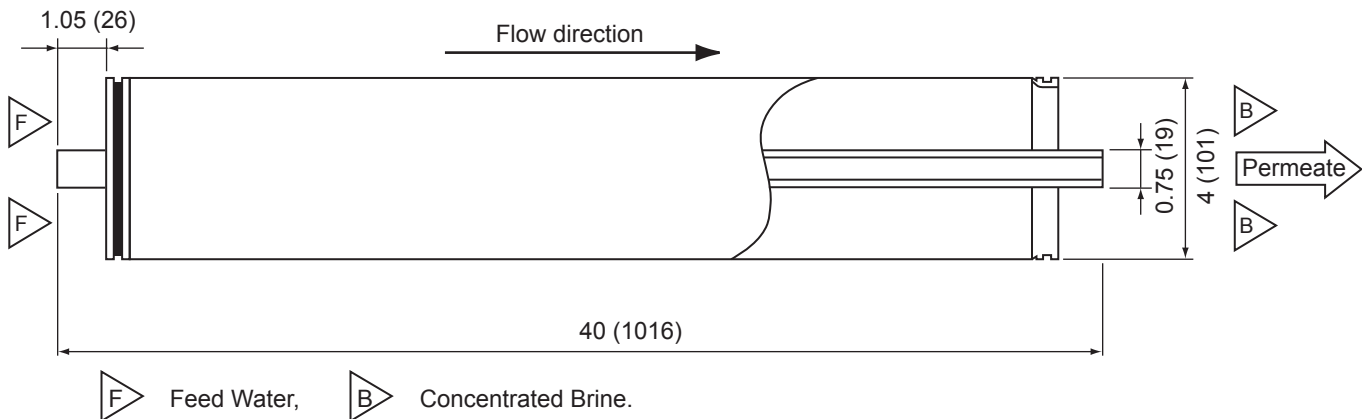

TORAY Industries, Inc. Membrane Products Department.
 8-1, Mihama 1-Chome, Urayasu, Chiba 279-8555, Japan

Tel +81 (47) 350 6030
 Fax +81 (47) 350 6066

TORAY Membrane America, Inc.
 USA., South America, Canada
 12520 High Bluff Drive, Suite 120, Tel +1 (858) 523 0476
 San Diego, CA 92130, USA Fax +1 (858) 523 0861

ROPUR AG
 Europe, Middle East and Africa
 Grabenackerstrasse 8 Tel +41 (61) 415 87 10
 CH-4142 Münchenstein 1, Switzerland Fax +41 (61) 415 87 20

Operating Limits:

Maximum Operating Pressure	365 psi (2.5 MPa)
Maximum Feed Water Temperature	104 °F (40 °C)
Maximum Feed Water Silt Density Index ₁₅	5
Feed Water Chlorine Concentration	Not Detectable
Feed Water pH Range, Continuous Operation	2 - 11
Feed Water pH Range, Chemical Cleaning	1 - 12
Maximum Pressure Drop per Element	20 psi (0.14 MPa)
Maximum Pressure Drop per Vessel	60 psi (0.4 MPa)

Operating Information:

1. For the recommended design range, please consult the latest Toray technical bulletin, design guidelines, computer design program, and/or call an application specialist. If the operating limits given in this Product Information Bulletin are not strictly followed, the Limited Warranty will be null and void.
2. All elements are wet tested, treated with a 1% by weight percent sodium bisulfite storage solution, and then vacuum bagged in oxygen barrier bags. To prevent biological growth during short term storage, shipment, or system shutdown, it is recommended that Toray elements be immersed in a protective solution containing 500 - 1,000 ppm of sodium bisulfite (food grade) dissolved in permeate.
3. Permeate from the first hour of operation should be discarded.
4. The customer is fully responsible for the effects of chemicals that are incompatible with the elements. Their use will void the element Limited Warranty.

Notice:

1. Toray accepts no responsibility for results obtained by the application of this information or the safety or suitability of Toray's products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.
2. All data may change without prior notice, due to technical modifications or production changes.